

RHINOCEROS




MY660

CRAWLER EXCAVATOR

SPECIFICATION		
Machine weight		635kg
Working device form		Backhoe
Standard bucket capacity		0.018 cbm
ENGINE	Model No.	LONGIN
	Displacement	302CC
	Rated power	6.8 kw/3600
	Max. torque	20.3 N.m/2500
Speed and digging force	Max. travel speed	2.5 km/h
	Swing speed	8 rpm
	Max. gradeability	30°
Track material		Rubber
Hydraulic and liquid capacity	Pump type	Gear pump
	Work pressure	16 MPa
	Flow rate	26.6L /min
	Hydraulic oil tank capacity	12 L
Fuel tank capacity		6 L

OPERATING RANGE		
A	Max.digging radius on ground	2250mm
B	Max.digging radius	2342mm
C	Max. digging depth	1250mm
D	Max. digging height	2107mm
E	Max. dumping height	1442mm
F	Max. vertical digging depth	350mm
G	Min. swing radius	1112mm
H	Max. blade lifting height	96mm
I	Max. blade lifting depth	116mm

MAIN DIMENSIONS		
a	Wheel base	807mm
b	Track length	1117mm
c	Upper chassis ground clearance	406mm
d	Counterweight turning radius	730mm
e	Chassis width	830mm
f	Track width	150mm
g	Track height	320mm
h	Transportation length	2170/2785mm
i	Height of seat to ground	1390mm
j	Total height	1711mm
m	Boom swing-left	48°
n	Boom swing-right	45°

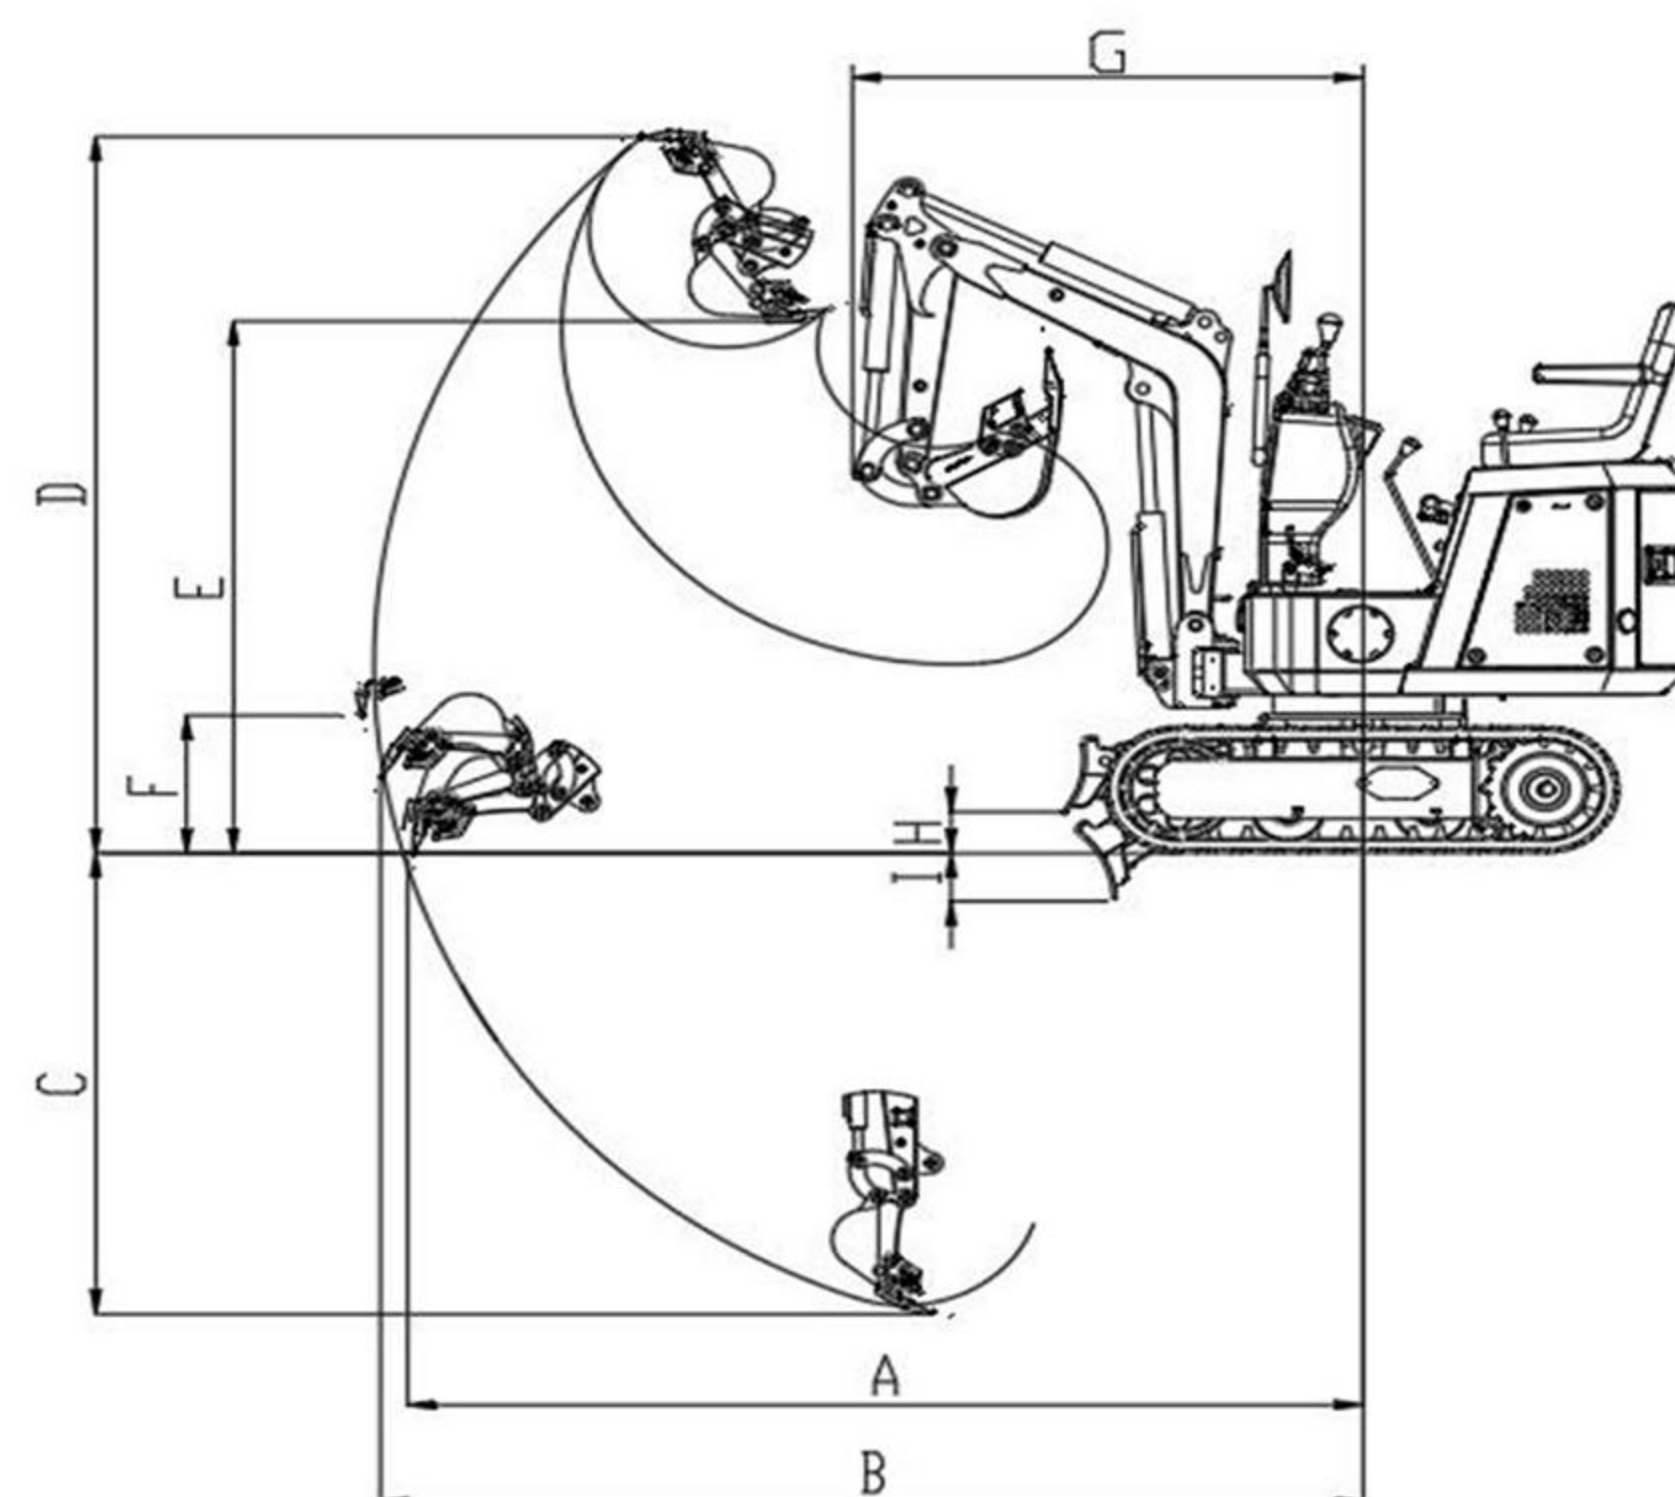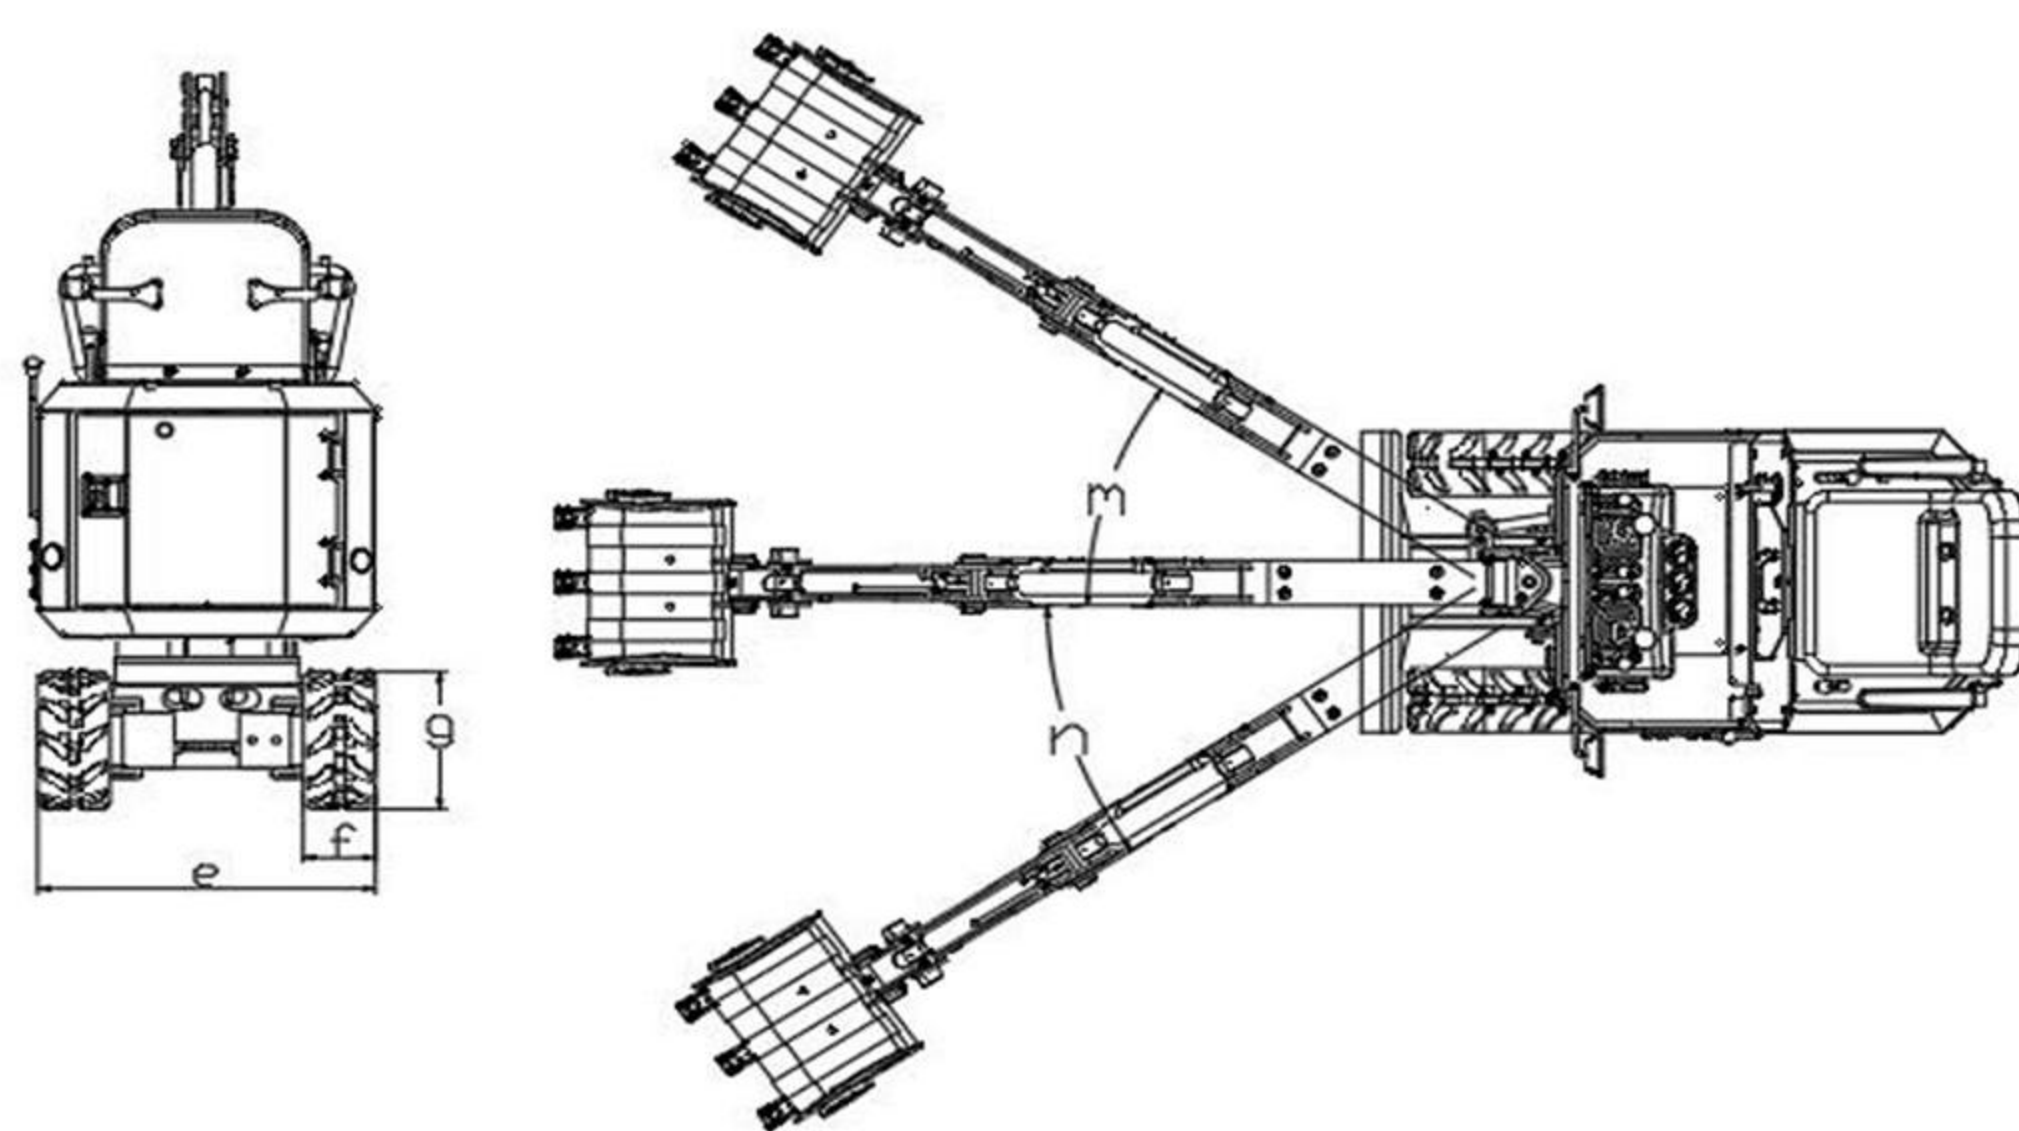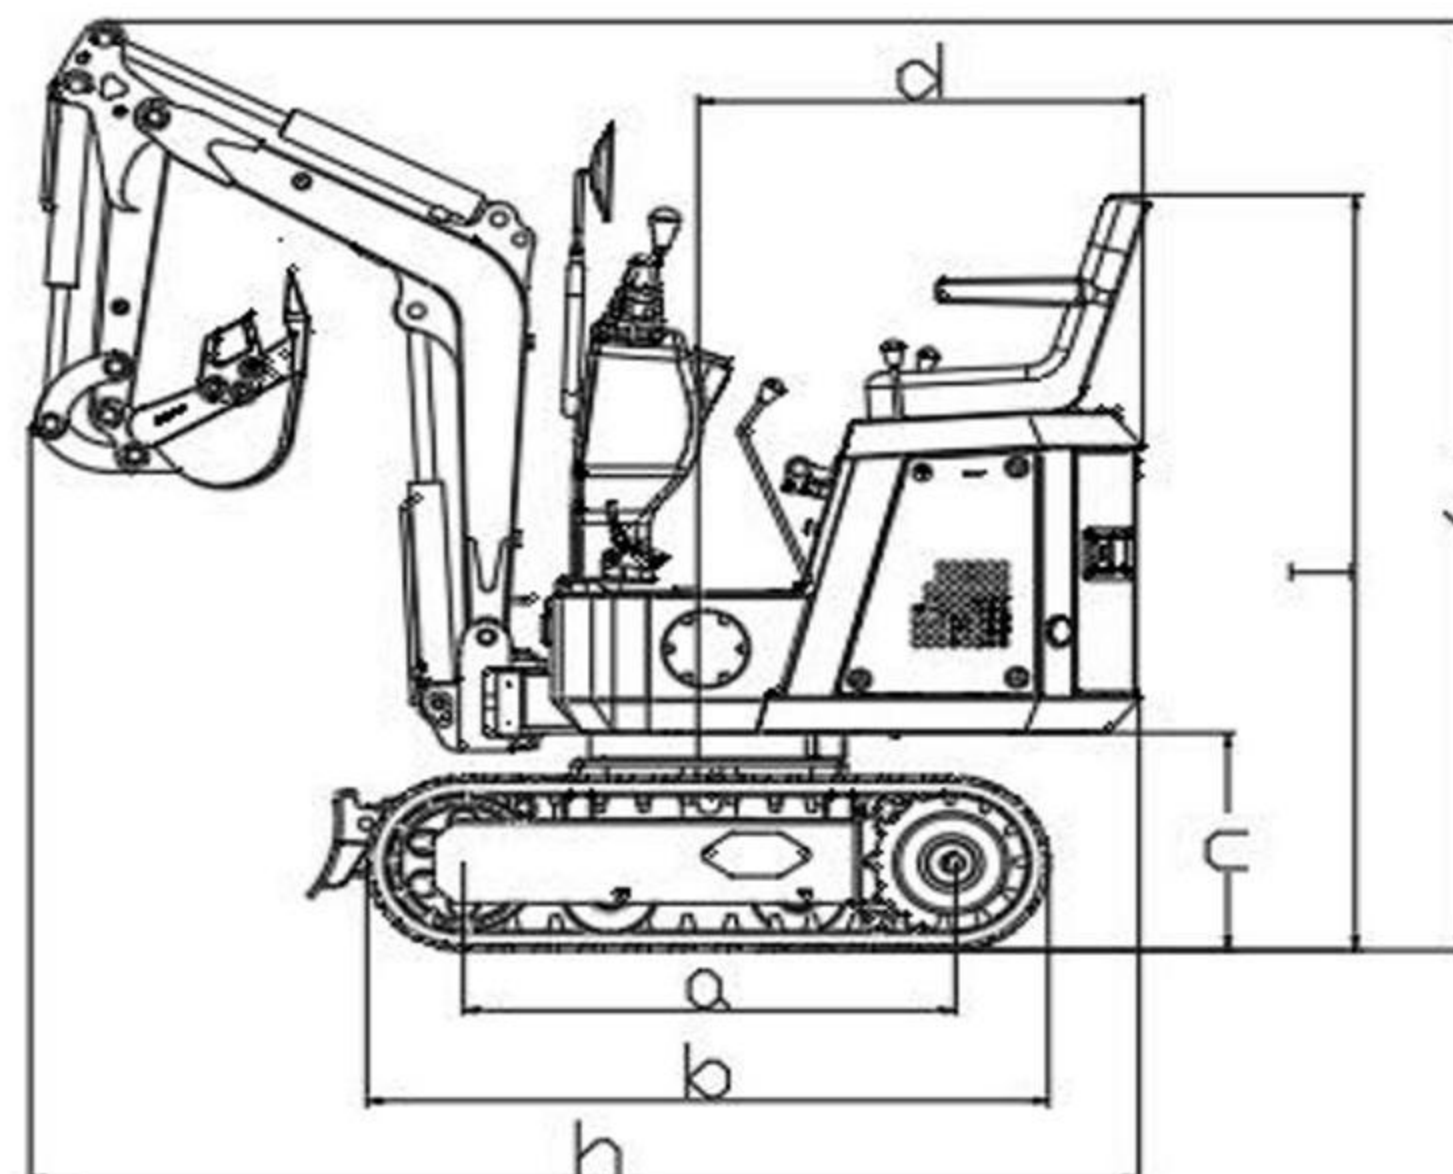

www.rhinoexcavator.com



SHANDONG KEN STONE HEAVY MACHINERY CO.,LTD



Address : Dingyuanzhai Industrial Park,Guan
County,Liaocheng city, Shandong Province, China
Postal code : 252512
Website : www.rhinoexcavator.com
E-mail : office@sdxiniu.com

Factory visit

MY660

CRAWLER EXCAVATOR